




LICENSE # 967669

W5000 Route and Return Silicone Joint System

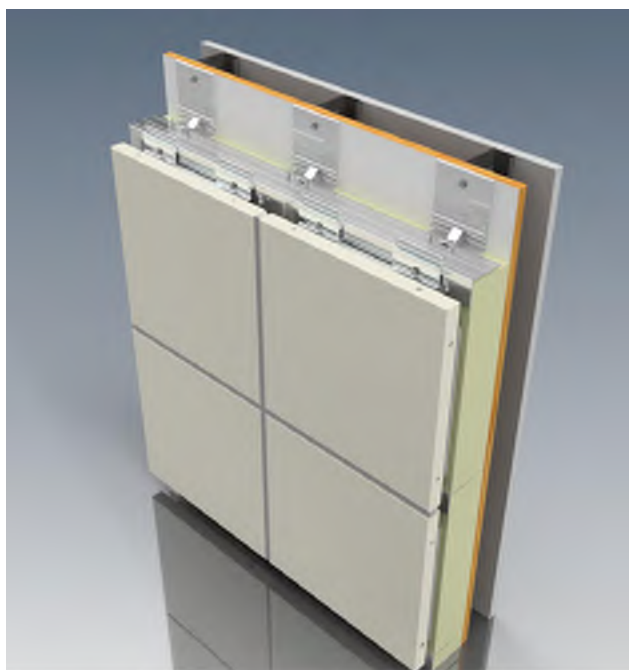

Route & Return Silicone Joint System

W5000 Route & Return Silicone Joint Panel Systems offer a weather tight economical assembly utilizing a closed cell backer rod, structural silicone joint and hidden fasteners. The non-progressive design offers installation versatility.

System Characteristics:

- Route & Return Caulked Joint
- Joint Width of 1/2 & 5/8"
- Non Progressive - Individual Removable Panels
- Most Economical System
- Available With MCM or Aluminum Plate

Face Material:

- Alucobond®
- Reynobond®
- ALPOLIC®
- Vitrabond®
- Aluminum Plate Alloy 3003 & 5052

System Depth:

1 11/16" minimum, 1 15/16" design

Panel Extrusions:

Aluminum Alloy: 6063-T6

Panel Perimeter Extrusion: Semi-Continuous

Fabricated Panel Tolerance:

Length: Plus 1mm (0.0394")

Width: Plus 1mm (0.0394")

Depth: Plus or minus 0.2mm (0.008")

Squareness: .5mm (0.016") maximum

Tested Systems & Code Compliance

At UBSM we are dedicated to making sure that our cladding systems meet and exceed all the project specific requirements for performance and adherence to local & International Building Code standards. Depending on the system we will clearly identify what tests and procedures were completed internally and with third party assistance.

ASTM E 283 - Static Air Infiltration

ASTM E 330 - Structural Design loads (40psf)

ASTM E 331 - Static Water Infiltration

NFPA 285 - Multi-Story Flame Spread Test

Florida Product Approval

*Details Available In Autocad & Revit